


Tasseau droit à serrage avant
Straight cleat with front clamping
Aufspanndorn - Frontal Klemmung

690

En acier rapide
Jusqu'à 6 mm
d'épaisseur
Rotation à droite
High-speed steel
Up to 6 mm
Right-hand rotation
In HSS
Dicke bis 6 mm
Rotation rechtsdrehend

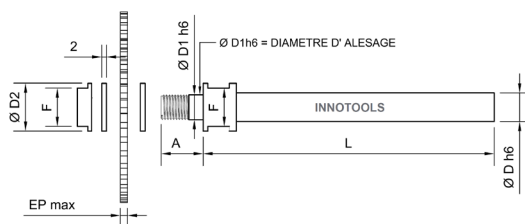

Ref.	D1	D	D2	L	A	F	ep max
690-3-5-5	3	5	5	60	7	4	3
690-5-6-10	5	6	10	70	9	8	6
690-5-6-7.5	5	6	7.5	70	7	6	3
690-5-10-10	5	10	10	80	9	8	6
690-6-10-12	6	10	12	80	9.5	10	6
690-8-10-15	8	10	15	80	10	13	6
690-8-12-15	8	12	15	90	10	13	6
6 90-10-6-18	10	6	18	80	10.5	15	6
690-10-10-18	10	10	18	80	10.5	15	6
690-10-16-18	10	16	18	100	10.5	15	6
690-13-16-22	13	16	22	110	11	19	6
690-16-10-22	16	10	22	80	8	19	6
690-16-20-26	16	20	26	120	12	22	6
690-22-16-32	22	16	32	132	13	27	6